

# Open Source MANO

OSM Hackfest – Session 3  
Adding day-0 configuration to VNFs  
Gerardo García (Telefónica)

# What is cloud-init and what can be used for?



- It is a Linux package used to automate initial configuration of a VM
- VM requirements:
  - Cloud-init package
  - Cloud-init configuration (data source) via /etc/cloud/cloud.cfg
    - Config drive
    - Openstack metadata server
    - ...
- What can be done?
  - Setting a default locale
  - Setting an instance hostname
  - Generating instance SSH private keys
  - Adding SSH keys to a user's .ssh/authorized\_keys so they can log in
  - Setting up ephemeral mount points
  - Configuring network devices
  - Adding users and groups
  - Adding files
- Docs: <http://cloudinit.readthedocs.io/en/latest/>


- Cloud-init is only available in Linux VMs
- Not all VIMs support cloud-init via a metadata server
- While cloud-init is supported in OSM, the recommendation is to use charms and initial-config-primitive

# VNF diagram

## Changes highlighted in yellow



External Connection point: vnf-mgmt      External Connection point: vnf-data

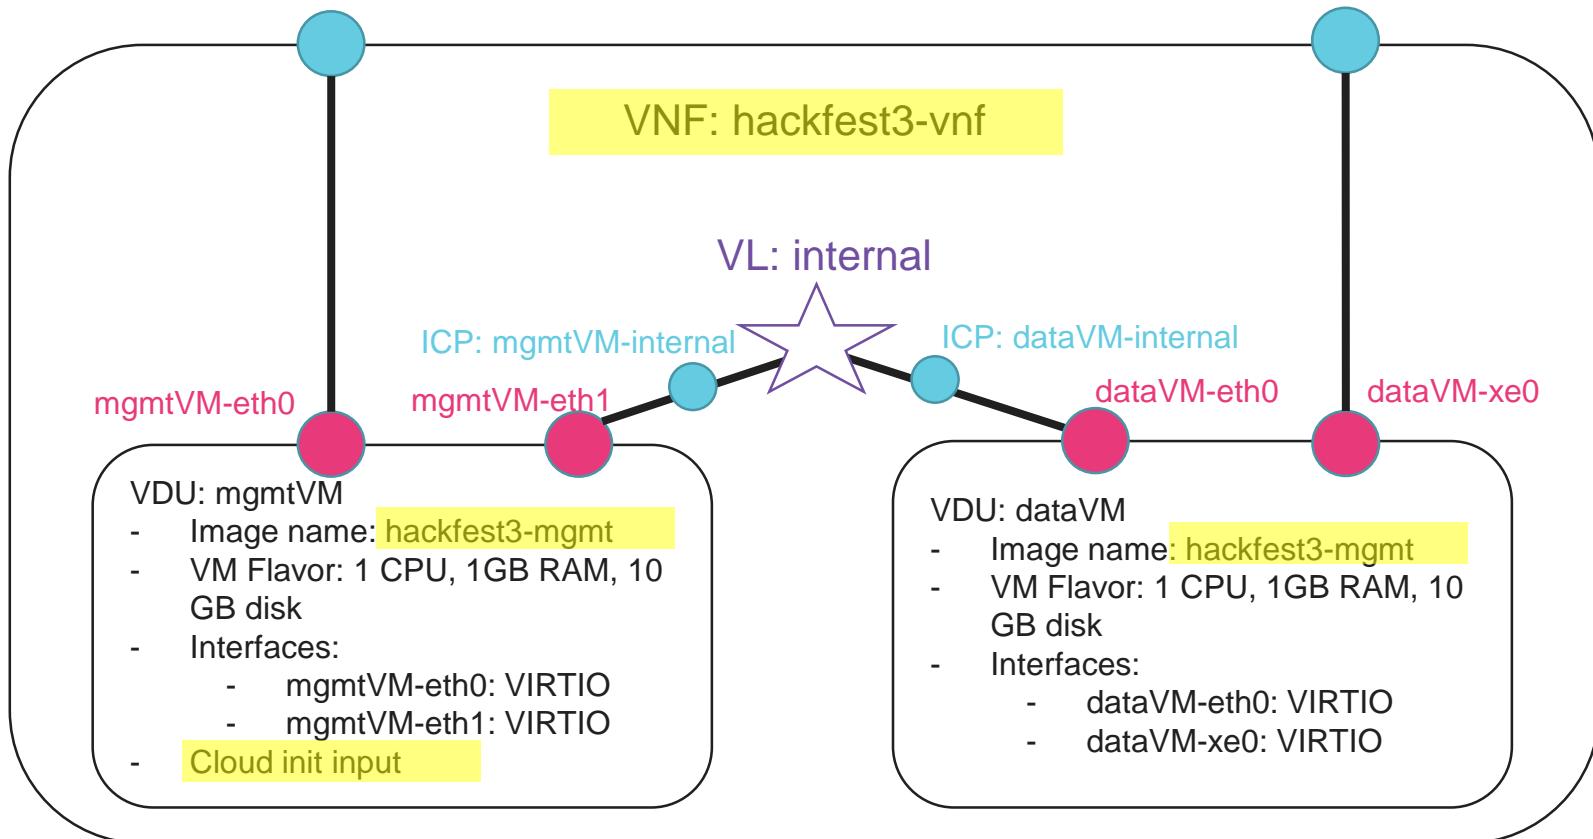

# Creating the VNF in the UI (1/2)



- Go to the catalog
- Copy VNF hackfest2
- Modify the new VNF
  - Name: hackfest3-vnf
- Modify VDU mgmtVM:
  - Image name: hackfest3-mgmt
  - Cloud init input:
    - Filename
      - Cloud init file: cloud-config.txt

# Creating the VNF in the UI (2/2)



- Modify VDU dataVM:
  - Image name: hackfest3-mgmt
- Add a new asset:
  - CLOUD\_INIT:
    - Upload file: cloud-config.txt
    - It can be downloaded from: <https://osm-download.etsi.org/ftp/osm-3.0-three/1st-hackfest/other/cloud-config.txt>
- Click on UPDATE to save your VNF

# Cloud-init file

- Download it from here:

- <https://osm-download.etsi.org/ftp/osm-3.0-three/1st-hackfest/other/cloud-config.txt>

- Content:

```
#cloud-config
password: osm4u
chpasswd: { expire: False }
ssh_pwauth: True

write_files:
- content: |
    # My new helloworld file

    owner: root:root
    permissions: '0644'
    path: /root/helloworld.txt
```




A password is added for the default user ('ubuntu'). This will be used by the charm in Hackfest session 5.

A new file '/root/helloworld.txt' will be created at VM creation to illustrate the way this feature works.

# NS diagram

## Changes highlighted in yellow

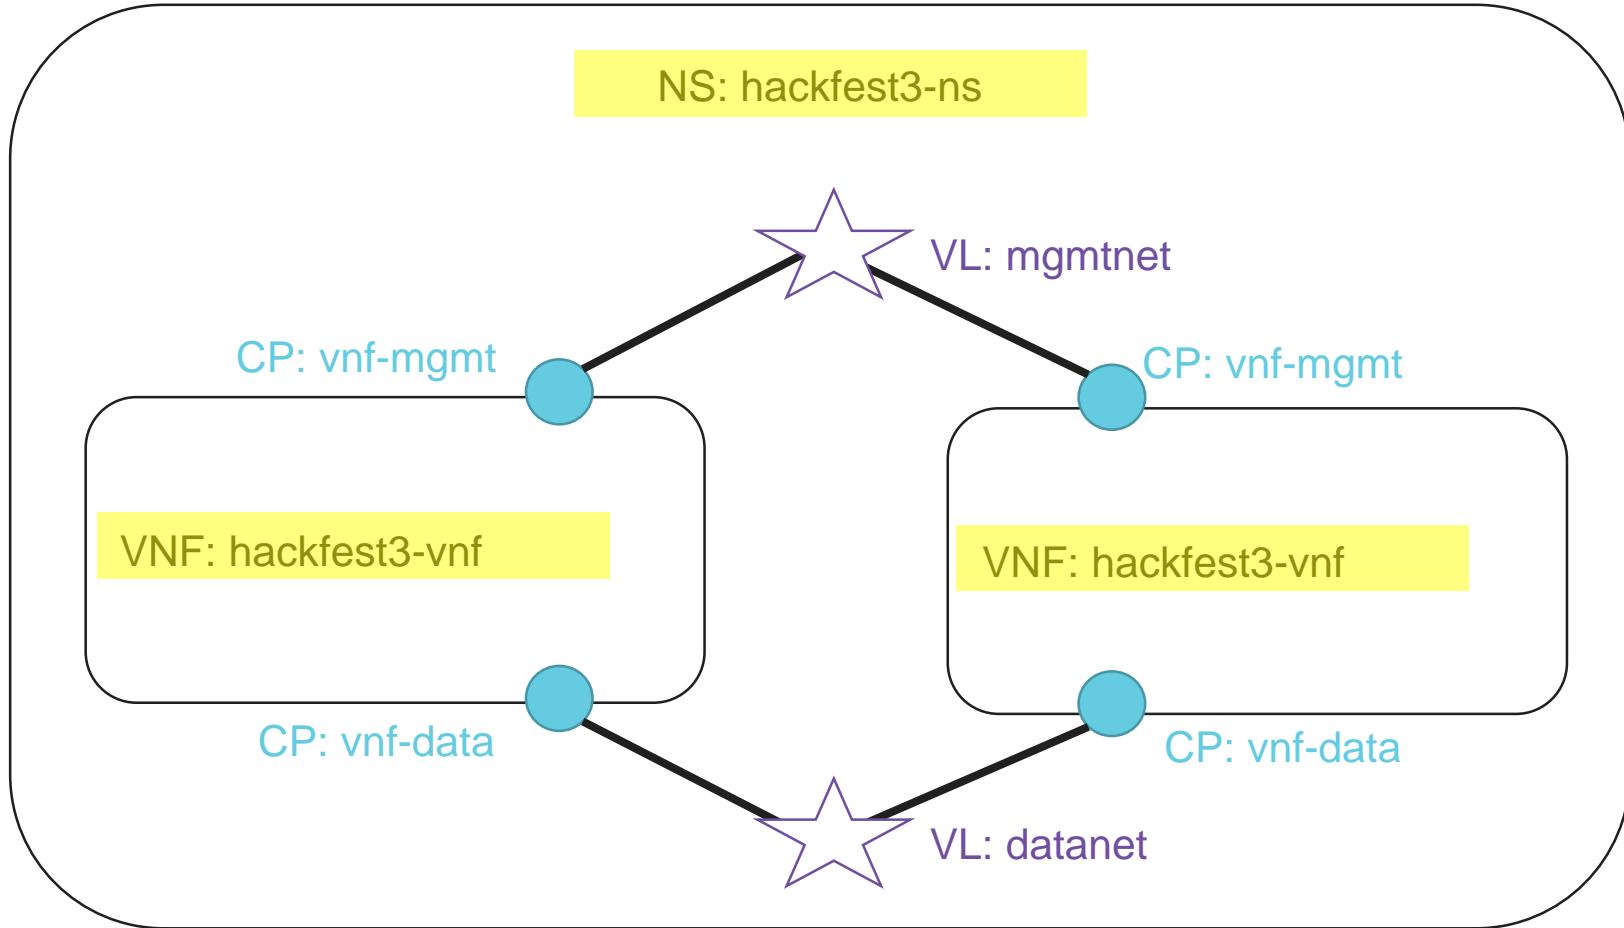

# Creating the NS in the UI(1/2)



- Go to the catalog
- Add NSD
  - Name: hackfest3-ns
- Add 2 VNFs (hackfest3-vnf) by drag and drop
- Add first VLDs:
  - VLD1:
    - name (optional): mgmtnet
    - TYPE: ELAN
    - MGMT NETWORK: True
    - INIT PARAMS
      - vim-network-ref
        - VIM NETWORK NAME: mgmt

<- In order to have a default mapped VIM network name

# Creating the NS in the UI(2/2)




- Add second VLD:
  - VLD2:
    - name (optional): datanet
    - TYPE:ELAN
    - MGMT NETWORK: False (default)
- Connect VNF Connection Points to the VLs:
  - vnf-mgmt to VLD:mgmtnet
  - vnf-data to VLD:datanet
- Click on UPDATE

# Deploying NS in the UI



- Go to Launchpad > Instantiate
- Select hackfest3-ns and click Next
- Complete the form
  - Add a name to the NS
  - Select the Datacenter where the NS will be deployed
  - Add SSH key
- Go to the dashboard to see the instance and get the mgmt IP address of the VNF
- Connect to each VNF:
  - ssh ubuntu@<IP>
- Check that the cloud-config file was executed

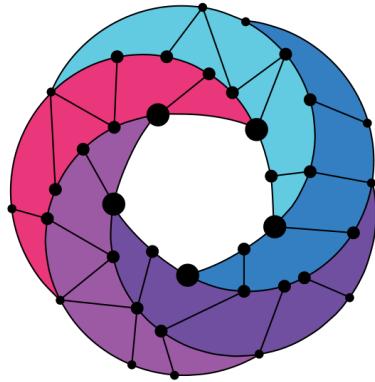

# Open Source MANO

Find us at:  
[osm.etsi.org](http://osm.etsi.org)  
[osm.etsi.org/wikipub](http://osm.etsi.org/wikipub)